

Quick Kiosk 21,5

Quick Kiosk 21,5" has a compact and aesthetic design that can be installed on a table and used as a natural interior item. It is a kiosk that can be installed with a 21.5-inch display without compromising the aesthetics of the store and has excellent functionality.



Quick Kiosk 21,5" Features



Counter-Top



Slim & Sleek



OS Support




Options

Quick Kiosk 21,5" System

	Quick Kiosk 21,5" AP	Quick Kiosk 21,5" AN	Quick Kiosk 21,5" EL	Quick Kiosk 21,5" A2
System				
	Windows			Android
Processors	Intel® Core™ i5-1235U Processor 12M Cache, up to 4.40 GHz Intel® Core™ i3-1215U Processor 10M Cache, up to 4.40 GHz	Intel® Processor N97 6M Cache, up to 3.60 GHz	Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz	RK3399 Dual-core Cortex-A72 up to 1.8GHz Quad-core Cortex-A53 up to 1.4GHz
Chipset	Intel® Alder Lake-P	Intel® Alder Lake-N	Intel® Elkhart Lake	
Memory	4GB Standard, DDR4 3200 MT/s, Socket 1 x SODIMM (Max. 32GB)	4GB Standard, DDR4 3200 MT/s, Socket 1 x SODIMM (Max. 16GB)	4GB Standard, DDR4 3200 MT/s, Socket 1 x SODIMM (Max. 32GB)	4GB Standard, LPDDR4, On-board
Storage	1. Form Factor NVMe M.2 2242-D2-M (No capacity limit.) 2. Mountable quantity: Up to 2 units can be installed. * Factory Default : NVMe M.2 2242 128GB x 1			eMMC 32GB, On-board (Max.64GB)
RAID	RAID 0,1	-		
Operating Systems	Windows 10 version 21H1 or higher		Windows 10 IoT Enterprise LTSC	Android 9.0/ 12
Audio	HD Audio Codec			

Quick Kiosk 21,5"

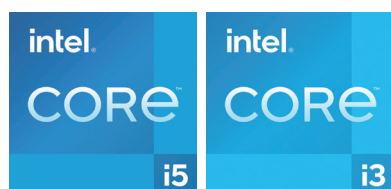

Superior performance



Powerful performance



Android RK3399

Quick Kiosk 21,5" Display | Interface

21.5"



	Quick Kiosk 21,5" AP	Quick Kiosk 21,5" AN	Quick Kiosk 21,5" EL	Quick Kiosk 21,5" A2
Display				
Type	21.5" TFT LCD, LED Backlight			
Resolution	1080 x 1920			
Brightness	250 cd/m² (typ.)			
Touchscreen	Projected Capacitive Touch			
Response	20 ms			
Contrast Ratio	3000 (typ.)			
Interface				
USB	External 6 (USB 3.0 x 2, USB 2.0 x 4) Internal 3 (USB 2.0 x 3 (Reserved for MSR, SCR, Printer))			
Serial	External 2 (COM10, COM 11(RJ-45, Full Signal)) Internal 3 (COM7 MDS(Motion Detection Sensor)) (COM12 Tx/Rx only, Reserved for SCR) (COM13 Reserved for Printer)		External 2 (COM 1, COM 2(RJ-45, Full Signal)) Internal 3 (COM 7 MDS (Motion Detection Sensor)) (COM 6 Tx/Rx only, Reserved for SCR) (COM5 Reserved for Printer)	
LAN	Gigabit Ethernet x 1, RJ-45			
WiFi/BT	-		Bluetooth (V5.0)+ WLAN (802.11 a/b/g/n, 2.4G/5G) combo module, On-board	
Power DC-IN	3 Pin DIN Jack			
Power				
Power Supply	Adaptor 24V, 6.35A			
Pedestal				
Material	Galvanized Steel Plate			
Material Thickness	1.2T			
Component Access	-			

Quick Kiosk 21,5" Physical & Environmental

	Quick Kiosk 21,5" AP	Quick Kiosk 21,5" AN	Quick Kiosk 21,5" EL	Quick Kiosk 21,5" A2
Physical & Environmental				
Operating Temperature	0 °C ~ 60 °C at 10% to 90% Humidity			
Storage Temperature	-20 °C ~ 60 °C at 10% to 90% Humidity			
Dimensions (W x D x H)	System: (W)333 x (D)200 x (H)750 (mm), (W)13.11 x (D)7.87 x (H)29.53 (in) Pedestal: (W)333 x (D)200 x (H)892 (mm), (W)12.95 x (D)7.87 x (H)35.11 (in) Baseplate: (W)440 x (D)310 x (H)8 (mm), (W)17.32 x (D)12.20 x (H)0.31 (in)			
Packing Dimensions (W x D x H)	System: (W)820 X (D)280 X (H)420 (mm), (W)32.28 x (D)11.02 x (H)16.53 (in) Pedestal (with baseplate): (W)950 X (D)270 X (H)420 (mm), (W)37.4 x (D)10.62 x (H)16.53 (in)			
Net Weight	System: 10,560g, 23.28 lbs Pedestal: 11,545g, 25.45 lbs Baseplate: 8,045g, 17.73 lbs			
Packing Weight	System: 13,610g, 30.00 lbs Pedestal (with baseplate): 23,580g, 51.98 lbs			
Certification	CE, FCC, KC			
Color	White			

Quick Kiosk 21,5" Options

	Quick Kiosk 21,5" AP	Quick Kiosk 21,5" AN	Quick Kiosk 21,5" EL	Quick Kiosk 21,5" A2
Options				
Storage	-			
Built-in Printer	3" Jam-Free Thermal, Max. 250mm/s, Auto Cutter (Interface : Serial, USB)			
Barcode Scanner	1D, 2D Barcode			
Camera	5M USB Interface (With Mic, Internal) (Factory Option)			
Magnetic Stripe Reader	Comply with ISO 7811, Support 1 & 2 & 3 Track			
Smart Card Reader	EMV Level 1			
NFC Reader	MIFARE, FeliCa, ISO/IEC 14443A, ISO/IEC 14443B, ISO/IEC 15693			
Wall Mount Kit (W x H x D)	(W)280 x (D)200 x (H)214(mm), (W)11.02 x (D)7.87 x (H)8.42			
Speaker	1 x 5W (Mono)			
WiFi	M.2 for WiFi/BT			-
Bracket Payment	EFT Terminal Bracket option			

*Specifications may change without prior notice.